



Wireless Temp. Transmitter IV-11 GPS, DCF, melody

433Mhz Temp. Transmitter.

The plan is to put the housing on the window sill, to mount inside.

The cable with sensor is 0.5m or 1.0m So the sensor can mounted outside and the housing including the electronics will be protected from moisture and Solar radiation protected.

Insert the cable on the left site and solder it to the NTC soldering points. Fix the wires, glue them on, in the strain relief.

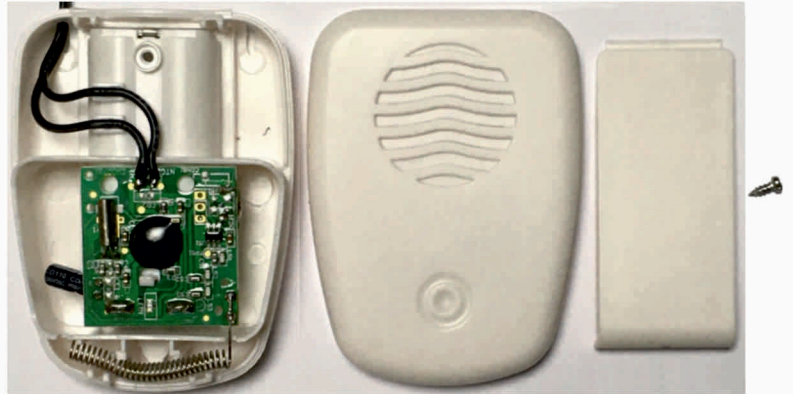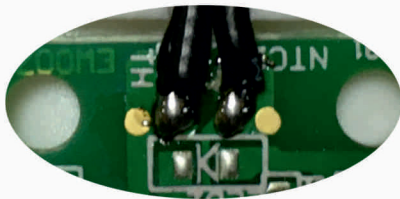

Close the housing, hook into the top where the antenna is and press together. Tighten the screw.